



Global[®] CB 2800 UTC Series - Coverstitch machines

TECHNICAL SPECIFICATIONS

Machine speed*

5500 spm

CB 2882/2823 - 4500 spm

Stitch type

602 or 605

Number of needles

2 or 3

Needle gauges

4.8 - 5.6 - 6.4 mm

Feed type

differential feed

Differential feed ratio

1:0.3 - 1:2.9

Stitch length

min. 1.4 mm

max. 3.6 mm

Presser foot lift

up to 7 mm

Needle type

UY 128 Gas

Bed type

cylinderarm

CB 2802 / 2803 - High speed, top and bottom cover chainstitch machines, cylinderarm, fully automatic lubrication and differential feed. Equipped with a lower and upper thread trimmer and presser foot lift (all pneumatic).

CB 2823 - Same as above, but with puller.

CB 2882 / 2883 - Same as CB 2802 / CB 2803, but with left hand knife.

MÁQUINAS RECUBRIDORAS

CB 2802 / 2803 - Máquina recubridora superior e inferior de alta velocidad, puntada de cadeneta, brazo cilíndrico, lubricación completamente automática y arrastre diferencial. Equipada con alza-prensatejas y corta-hilos para el hilo superior e inferior (todo neumático).

CB 2823 - Las mismas características que la CB 2802 / 2803, pero equipada con puller.

CB 2882 / 2883 - Las mismas características que la CB 2802 / 2803, pero equipada con cuchilla lateral.

ÜBERDECKNAHT-MASCHINEN

CB 2802 / 2803 - Hochleistungs- Zylinder Überdecknahtmaschinen mit Differentialtransport, vollautomatisch geschmiert. Ausgerüstet mit einem Ober- und Unterfadenabschneider sowie Drückerfusslüftung (alle pneumatisch).

CB 2823 - Baugleich wie oben, jedoch mit Puller.

CB 2882 / 2883 - Baugleich mit CB 2802 / 2803, jedoch mit Kantenbeschneidung links.

MACHINE CANON

CB 2802 / 2803 - Machine canon point de chaînette à grande vitesse, lubrification entièrement automatique et griffe différentielle, recouvrement dessus / dessous. Equipée avec coupe-fils inférieur et supérieur et relevage du pied presseur (tout pneumatique).

CB 2823 - Modèle identique à la version ci-dessus, mais avec en plus un puller.



CB 2882 / 2883 - Modèle identique à la version ci-dessus, mais avec couteau à gauche des aiguilles.

Global CB 2800 UTC Series

The Global CB 2800 UTC Series are high quality 2 or 3 needle cylinder bed machines with top and bottom cover stitch and improved differential feed mechanism. These machines are equipped with a lower and upper thread trimmer and presser foot lift (all pneumatic). CB 2880 Series are equipped with left hand fabric trimmer, including thread trimmer.

Some features of the Global® CB 2800 UTC Series

- swing-up type looper for easy threading
- fully automatic lubrication
- high quality precision parts
- interchangeable oil-filter
- high speed: up to 5500 spm
- vibration free
- cylinder dimensions: (w x h)
90 x 60 mm

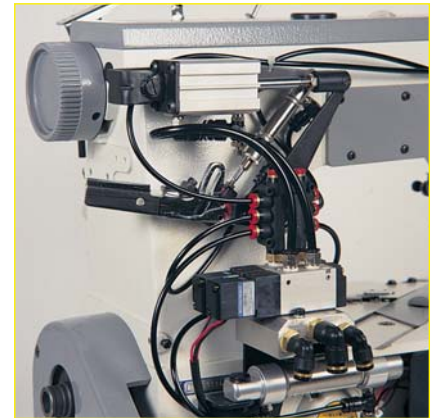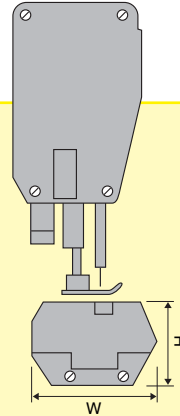

Pneumatic thread trimmer and presser foot lift



CB 2882 / 83 is equipped with a left hand knife



Global® model CB 2823 with puller



Pneumatic upper thread trimmer

Specifications

model	number of needles	number of threads	needle distance			outside stitch length mm	differential feed ratio mm	presser foot lift	needle system	max. sewing speed*
			4.8 mm	5.6 mm	6.4 mm					
CB 2802 UTC	2	4	●	—	—	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	5500
CB 2803 UTC	3	5	—	●	—	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	5500
CB 2803 UTC	3	5	—	—	●	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	5500
CB 2823 UTC	3	5	—	—	●	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	5500
CB 2882 UTC	2	4	●	—	—	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	4500
CB 2883 UTC	3	5	—	●	—	1.4 - 3.6	1:03 - 1:2.9	7	UY128GAS	4500

* Max. sewing speed (in spm.) depends on type of operation and/or materials to be sewn.

The GLOBAL® Selection is brought to you by:

GLOBAL® is a trademark of the Global International Corporation, the people that carefully organize the supply of spareparts before they launch each product.

When ordering parts please specify:
 1 machine model
 2 part numbers