



NF 331 AUT

Global[®] NF 300 Series - Single needle, needle feed machines

TECHNICAL SPECIFICATIONS

Machine speed*
up to 5000 spm

Stitch type
301

Number of needles
1

Stitch length
NF 331 (AUT) - 4 mm
NF 331 LH (AUT) - 5 mm

Needle type
134R

Presser foot lift
up to 5 mm (by hand)
up to 11 mm (by knee)

Electric presser foot lift
optional

NF 331 - High speed single needle lockstitch machine with reversible needle feed. Machine has automatic lubrication. Stitch length 4 mm.

NF 331 LH - Same as above, but with large hook and 5 mm stitch length.

NF 331 AUT - Same as NF 331, but with thread trimmer and back tack (solenoid).

NF 331 LH-AUT - Same as NF 331 LH, but with thread trimmer and back tack (solenoid).

MÁQUINAS DE UNA AGUJA CON ARRASTRE POR AGUJA Y DIENTE

NF 331 - Máquina de una aguja, arrastre por aguja y dientes. Lubricación automática. Largo de puntada 4 mm.

NF 331 LH - La misma que la NF 331, pero equipada con garfio grande y largo de puntada 5 mm.

NF 331 AUT - La misma que la NF 331, pero equipada con corta-hilos y remate eléctrico.

NF 331 LH-AUT - La misma que la NF 331 LH, pero equipada con corta-hilos y remate eléctrico.

EINNADEL, NADELTRANSPORTMASCHINEN

NF 331 - Hochgeschwindigkeits-, Einnadel-Stepstichmaschine mit Nadeltransport, auch rückwärts nähend. Die Maschine hat automatische Schmierung. Stichlänge 4 mm.

NF 331 LH - Baugleich mit NF 331, jedoch mit grossem Greifer und Stichlänge 5 mm.

NF 331 AUT - Baugleich mit NF 331, jedoch mit Fadenabschneider und Verriegelung (Solenoid).

NF 331 LH-AUT - Baugleich mit NF 331 LH, jedoch mit Fadenabschneider und Verriegelung (Solenoid).

MACHINE DOUBLE ENTRAÎNEMENT À UNE AIGUILLE

NF 331 - Machine point noué une aiguille à grande vitesse, entraînement par griffe et aiguille. Lubrification automatique. Longueur de point 4 mm.


NF 331 LH - Identique au modèle NF 331, mais avec crochet grande capacité et longueur de point 5 mm.

NF 331 AUT - Identique au modèle NF 331, mais avec coupe-fil et arrêts automatiques par électro-aimant.

NF 331 LH-AUT - Identique au modèle NF 331 LH, mais avec coupe-fil et arrêts automatiques par électro-aimant.

Global NF 300 series


These new single needle, needle feed machines are most dependable light running machines for sewing light to medium heavy materials. These machines will produce a top quality stitch on light materials.

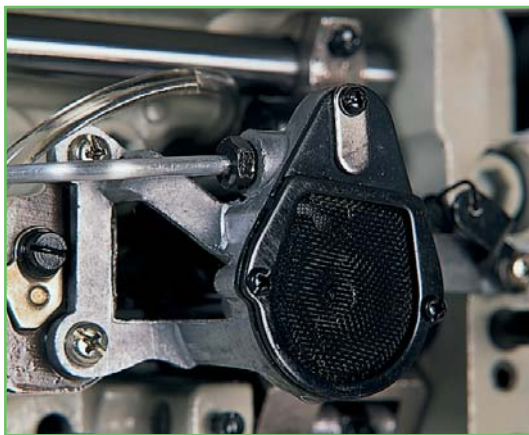

A built-in oil reservoir, pump and minimum of wicking features constant lubrication where required. Oil flow can easily be checked through sightgauge on top of the machine head.



The NF 331 AUT is equipped with an electromechanical underbed thread trimming device.

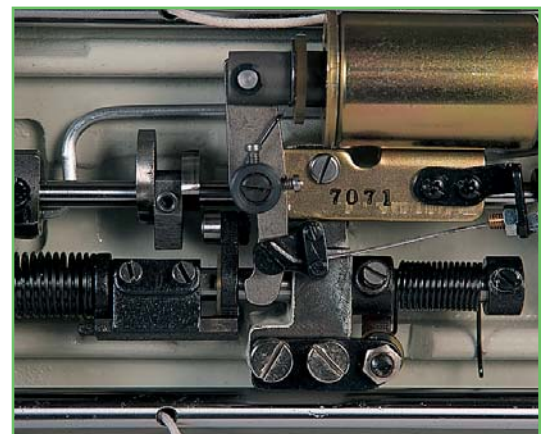

The electrical thread trimmer movement of the NF 331 AUT.

Specifications

model	number of needles	max. stitch length mm	presser foot lift (mm)		space to right of needle mm	bedplate dimensions mm	needle system	max. sewing speed*	thread trimmer	back tack/ reverse	electric presser foot lift
			by hand	by knee							
NF 331	1	4	5	11	260	480x178	134R	5000	—	manual	—
NF 331 LH	1	5	5	11	260	480x178	134R	3000	—	manual	—
NF 331 AUT	1	4	5	11	260	480x178	134R	5000	•	aut.	option
NF 331 LH-AUT	1	5	5	11	260	480x178	134R	3000	•	aut.	option

★ Max. sewing speed (in spm.) depends on type of operation and/or materials to be sewn.

The GLOBAL® Selection is brought to you by:

GLOBAL® is a trademark of the Global International Corporation, the people that carefully organize the supply of spareparts before they launch each product.

When ordering parts please specify:
 1 machine model
 2 part numbers